

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. § 371**

Attorney Docket No.  
M61.12-0392

410 Rec'd PCT/PTO 11 SEP 2001  
U.S. Application No.  
09/936623

INTERNATIONAL APPLICATION  
PCT/GB 00/00441

INTERNATIONAL FILING DATE  
11.02.2000

PRIORITY DATE CLAIMED  
12.03.99

TITLE OF INVENTION  
MAN-MACHINE DIALOGUE SYSTEM AND METHOD

APPLICANT(S) FOR DO/EO/US  
MATHESON, Caroline

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
  2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
  3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (20) indicated below.
  4. ☒ The US has been elected by the expiration of the 19th month from the priority date (Article 31).
  5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
    - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
    - b. ☐ has been communicated by the International Bureau.
    - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
  6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
    - a. ☐ is attached hereto.
    - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
    - c. ☒ is not required, as the application was filed in English
  - ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
    - a. ☐ are attached hereto (required only if not transmitted by the International Bureau).
    - b. ☐ have been transmitted by the International Bureau.
    - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
    - d. ☐ have not been made and will not be made.
  8. ☐ A translation of the amendment to the claims under PCT Article 19 (35 U.S.C. 372(c)(3)).
  9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
  10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 37(c)(5)).
- Items 11. to 17. Below concern document(s) or information included:**
11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and .198.
  12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included.
  13. ☐ A **FIRST** preliminary amendment.
  14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
  15. ☐ A substitute specification.
  16. ☐ A change of power of attorney and/or address letter.
  17. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
  18. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
  19. ☐ Other items or information:
    - a. ☒ Four (4) sheets of drawings.
    - b. ☒ Abstract typed on a separate page.
    - c. ☐


U.S. APPLICATION NO. <b>09/936623</b>		INTERNATIONAL APPLICATION NO. PCT/GB 00/00441		ATTORNEY'S DOCKET NUMBER M61.12-0392	
20. <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492(A)(1)-(5)):</b> Search Report has been prepared by the EPO or JPO.....\$860.00  International preliminary examination fee paid to USPTO (37 CFR 1.482) .....\$690.00  No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)).....\$710.00  Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$1000.00  International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4).....\$ 100.00				<b>CALCULATIONS PTO USE ONLY</b>	
<b>ENTER APPROPRIATE BASIC FEE AMOUNT</b> =				\$860.00	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0	
<b>CLAIMS</b>	<b>NUMBER FILED</b>	<b>NUMBER EXTRA</b>	<b>RATE</b>		
Total claims	15 - 20 =	0	X 18	\$0	
Independent claims	1 - 3 =	0	X 80	\$0	
MULTIPLE DEPENDENT CLAIM (S) (if applicable)			+ \$270.00	\$0	
<b>TOTAL OF ABOVE CALCULATIONS</b> =				\$860	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0	
<b>SUBTOTAL</b> =				\$860	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f))				\$0	
<b>TOTAL NATIONAL FEE</b> =				\$860	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property.				\$0	
<b>TOTAL FEES ENCLOSED</b> =				\$860	
				<b>Amount to be:</b>	
				<b>refunded</b> \$	
				<b>charged</b> \$	

- a. ☒ A charge authorization (PTO-2038) in the amount of \$860.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. **23-1123** in the amount of \$ to cover the above fees.  
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment,  
to Deposit Account No. **23-1123**. A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (1.37(a) or (b)) must be filed and granted to restore the application to pending status.**

Send all correspondence to:

WESTMAN, CHAMPLIN & KELLY, P.A.  
Suite 1600 - International Centre  
900 Second Avenue South  
Minneapolis, MN 55402-3319

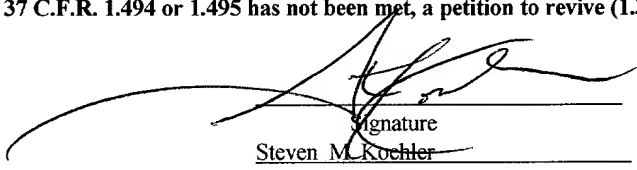  
 Signature  
 Steven M. Kochler  
 Reg. No. 36,188

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

First Named  
Inventor : Caroline Matheson

Appln. No.:

Filed : HEREWITH

For : MAN-MACHINE DIALOGUE SYSTEM  
AND METHOD

Docket No.: M61.12-0392

Group Art Unit:

Examiner:

**PRELIMINARY AMENDMENT**

**Express Mail No. EL 844347657 US---**

**Date of Deposit: September 11, 2001**

Commissioner for Patents  
Washington, D.C. 20231

Sir:

Prior to the first Official Action, it is respectfully requested that the following amendments be made.

IN THE SPECIFICATION

Please amend the Specification as follows:

**Page 1, line 1, after the title, please insert a new paragraph:**

CROSS REFERENCE TO RELATED APPLICATION

The present application is a national stage filing of and claims priority of International patent application Serial No. PCT/GB00/00441, filed February 11, 2000, and published in English the content of which is hereby incorporated by reference in its entirety.

**Page 1, line 1, after the title, please insert the following section heading:**

BACKGROUND OF THE INVENTION

This invention relates to an man-machine dialogue system and a method for realising the same. The techniques proposed here can be applied to diverse input and output modalities, for example, graphics devices and touch sensitive devices, but a particular example of this invention is spoken dialogue systems, where system and user communicate primarily through speech.

**Page 3, after line 15, please insert the following section heading:**

SUMMARY OF THE INVENTION

According to the present invention, there is provided a man-machine dialogue system employing an interactive computer system comprising:

**Page 5, after line 2, please insert the following section heading:**

BRIEF DESCRIPTION OF THE DRAWINGS

On example of the present invention will now be described with reference to the accompanying drawings, in which:

**Page 5, after line 17, please insert the following section heading:**

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The main components of a system according to the present invention are illustrated in figure 1. Overall operation is controlled by dialogue control means 1 according to an application-specific dialogue specification the function of which is to exchange information with a user and access, update, or otherwise exercise control over an object system 3. User interaction consists of a sequence of question/answer cycles where each question is designed to elicit some specific information. Output is generated by means of a generator, in this example a speech output generator. The

response of the user is processed by the input device 4, in this example, a speech recogniser. Based upon any input the dialogue control means 1 updates its internal control state and determines the next action of the system. This continues until the information need of the user is satisfied and the interactive operation is terminated.

IN THE CLAIMS

Please amend the claims as follows:

4. (Amended) A system according to claim 1, wherein each state is associated with an action or actions, and each action may receive, modify and transmit a token or tokens.
5. (Amended) A system according to claim 1, employing an ATN to specify the course of the dialogue, and wherein each state may represent a junction, a system action, such as a user interaction, or an embedded dialogue represented by a further augmented transition network.
6. (Amended) A system according to claim 1, where the input device is a speech recognizer.
7. (Amended) A system according to claim 1, where the input device is constrained by a set of statistical grammars which may be defined using an ATN.
8. (Amended) A system according to claim 7, wherein each of the states may represent a junction, a terminal state, such as a word or other acoustical phenomenon, or an embedded statistical grammar represented by a further ATN.
9. (Amended) A system according to claim 7, wherein tokens are propagated from the user-interaction dialogue state to the start of

the input network, and through a best matching path of the input network back to the user-interaction dialogue state.

10. (Amended) A system according to claim 7, wherein a token is propagated for each alternative input hypothesis considered by the input device, and the score assigned to the hypothesis is a modifiable field of the token.

11. (Amended) A system according to claim 1, wherein the output device is a speech generator.

12. (Amended) A system according to claim 1, wherein user output is represented by an augmented transition network.

13. (Amended) A system according to claim 11, where the states represent an output word or other acoustical or linguistic phenomenon.

Applicants respectfully request entry of this Preliminary Amendment prior to the first Official Action and prior to calculating the fees for the application. The amendments to the claims reflect the claims entered in response to the Written Opinion.

The Director is authorized to charge any fee deficiency required by this paper or credit any overpayment to deposit account No. 23-1123.

WESTMAN, CHAMPLIN & KELLY, P.A.

~~Steven M. Koehler, Reg.No. 36,188  
Suite 1600 - International Centre  
900 Second Avenue South  
Minneapolis, Minnesota 55402-3319  
Phone:(612) 334-3222 Fax:(612) 334-3312~~

SMK: jmb

**MARKED-UP VERSION OF REPLACEMENT PARAGRAPHS**

**Page 1, line 1, after the title, please insert a new paragraph:**

**CROSS REFERENCE TO RELATED APPLICATION**

The present application is a national stage filing of and claims priority of International patent application Serial No. PCT/GB00/00441, filed February 11, 2000, and published in English the content of which is hereby incorporated by reference in its entirety.

**Page 1, line 1, after the title, please insert the following section heading:**

**BACKGROUND OF THE INVENTION**

This invention relates to an man-machine dialogue system and a method for realising the same. The techniques proposed here can be applied to diverse input and output modalities, for example, graphics devices and touch sensitive devices, but a particular example of this invention is spoken dialogue systems, where system and user communicate primarily through speech.

**Page 3, after line 15, please insert the following section heading:**

**SUMMARY OF THE INVENTION**

According to the present invention, there is provided a man-machine dialogue system employing an interactive computer system comprising:

**Page 5, after line 2, please insert the following section heading:**

**BRIEF DESCRIPTION OF THE DRAWINGS**

On example of the present invention will now be described with reference to the accompanying drawings, in which:



Page 5, after line 17, please insert the following section heading:

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The main components of a system according to the present invention are illustrated in figure 1. Overall operation is controlled by dialogue control means 1 according to an application-specific dialogue specification the function of which is to exchange information with a user and access, update, or otherwise exercise control over an object system 3. User interaction consists of a sequence of question/answer cycles where each question is designed to elicit some specific information. Output is generated by means of a generator, in this example a speech output generator. The response of the user is processed by the input device 4, in this example, a speech recogniser. Based upon any input the dialogue control means 1 updates its internal control state and determines the next action of the system. This continues until the information need of the user is satisfied and the interactive operation is terminated.

**MARKED-UP VERSION OF REPLACEMENT CLAIMS**

4. (Amended) A system according to ~~any of claims 1 to 3~~, wherein each state is associated with an action or actions, and each action may receive, modify and transmit a token or tokens.

5. (Amended) A system according to ~~any of claims 1 to 3~~, employing an ATN to specify the course of the dialogue, and wherein each state may represent a junction, a system action, such as a user interaction, or an embedded dialogue represented by a further augmented transition network.

6. (Amended) A system according to ~~any of claims 1 to 5~~, where the input device is a speech recognizer.

7. (Amended) A system according to ~~any of claims 1 to 6~~, where the input device is constrained by a set of statistical grammars which may be defined using an ATN.

8. (Amended) A system according to ~~claim 6 or claim 7~~, wherein each of the states may represent a junction, a terminal state, such as a word or other acoustical phenomenon, or an embedded statistical grammar represented by a further ATN.

9. (Amended) A system according to ~~claim 7 or claim 8~~, wherein tokens are propagated from the user-interaction dialogue state to the start of the input network, and through a best matching path of the input network back to the user-interaction dialogue state.

10. (Amended) A system according to ~~claim 7, 8 or 9~~, wherein a token is propagated for each alternative input hypothesis considered by the input device, and the score assigned to the hypothesis is a modifiable field of the token.

11. (Amended) A system according to ~~any of claims 1 to 10~~, wherein the output device is a speech generator.

12. (Amended) A system according to ~~any of claims 1 to 11~~, wherein user output is represented by an augmented transition network.

13. (Amended) A system according to ~~claim 11 or claim 12~~, where the states represent an output word or other acoustical or linguistic phenomenon.

05363103

## ABSTRACT

A man-machine dialogue system employing an interactive computer system comprising an input device for receiving input from the user. An output device generating output to the user. There is provided an object system which is an information source or store, or a command and control device. The system has a dialogue manager, which orchestrates the dialogue between the object system and user dependent upon a dialogue specification. The specification employs a set of augmented transition networks (ATNs), through which are propagated one or more tokens, the token comprising a set of fields which together define the current state of belief of the dialogue controller, dependent upon the preceding user-system interchanges and information obtained from the object system.

CONFIDENTIAL

4/PRTS

JG03 Rec'd - G/T/O

09/936623

11 SEP 2001

WO 00/55843

1

PCT/GB00/00441

MAN-MACHINE DIALOGUE SYSTEM AND METHOD

This invention relates to an man-machine dialogue system and a method for realising the same. The

5 techniques proposed here can be applied to diverse input and output modalities, for example, graphics devices and touch sensitive devices, but a particular example of this invention is spoken dialogue systems, where system and user communicate primarily through speech.

10 Speech generation and recognition technology is maturing rapidly, and attention is switching to the problems associated with the use of such technology in real applications, particularly in applications which allow a human to use voice to interact directly with a  
15 computer-based information control system. Apart from the simplest of cases, such systems involve a sequence of interactions between the user and the machine. They therefore involve dialogue and discourse management issues in addition to those associated with prompting the  
20 user and interpreting the responses. The systems are often referred to as spoken dialogue systems (SDS).

Examples of interactive speech recognition systems are telephone directory systems, travel information and reservation systems, etc. With such systems information  
25 is obtained from a user by recognising input speech that is provided in response to prompt questions from the system.

The key issues in designing an SDS are how to specify and control the dialogue flow; how to constrain  
30 the recogniser to work within a limited domain; how to interpret the recognition output; and how to generate contextually appropriate responses to the user. The design criteria which motivate the solutions to these issues are many and varied but a key goal is to produce  
35 a system which allows a user to complete the required tasks quickly and accurately.

09/936623

In recent years many attempts have been made to realise such systems with varying degrees of success.

Today's state-of-the-art dialogues aim to understand "natural language" responses by users and typically use a mixed initiative approach, in which the user is not constrained to answer the system's direct questions. For example, in response to the question "Where do you want to go to?", a user should be allowed to say "To Edinburgh tomorrow evening". This answers the direct question and anticipates a later question. The approach has a number of consequences. It means, for example, that recognition accuracy must be high and parsing algorithms sophisticated in order to interpret what the user says. It raises problems with respect to the modularity and re-usability of dialogue sub-components. It can cause serious instabilities in the system due to increased chances of misunderstanding caused by recognition inaccuracies. Lastly, however much care is put into the design of such systems, misunderstandings will inevitably arise, and the system will be required to back-track, a non-trivial process in complex systems.

A further problem associated with such systems is that they can be highly labour intensive to develop and test, making them expensive to install and maintain.

Current approaches to dialogue control are varied but typically involve the use of specification using flow-charts and run-time control based on some form of augmented transition network. Essentially, this consists of a set of states linked together by directional transitions. States represent some action of the SDS, such as a question/answer cycles, data processing, simple junctions or sub-dialogues which expand to other networks. Transitions, and their associated transition conditions, determine the course of dialogue flow after the state has been executed.

Similar networks may also be used in SDS in order to provide syntactic constraints for speech input. Grammatical rules may be expressed in the form of finite state networks. Again these consist of states and transitions, but in this case the states represent some acoustic phenomenon, such as a word, to be matched with incoming speech data, or, as before, sub-networks or simple junctions.

Speech output is typically derived from a simple text string which is then translated by the output device into spoken speech by using some form of text-to-speech algorithm or by concatenating previously recorded acoustic waveforms. This may be represented as a very simple network with a single permissible path and each output word representing a state.

According to the present invention, there is provided a man-machine dialogue system employing an interactive computer system comprising:

- an input device for receiving input from a user;
- an output device for generating output to a user;
- an object system which is an information source or store, or a command and control device, the object of the dialogue being to interface between this system and user;
- a dialogue manager, which controls the dialogue between the object system and user dependent upon: a dialogue specification, comprising a set of augmented transition networks (ATNs), through which are propagated one or more tokens, each token comprising a set of fields which together define the current state of belief of the dialogue controller, dependent upon the preceding user-system interchanges and information obtained from the object system.

A corresponding method is also provided. Furthermore, a tool for generating a system of the type described above is also provided.

The central theme of this application relates to the many advantages to be gained from implementing an SDS as a

process of passing tokens around an augmented transition network embracing the dialogue, input and output networks noted above. If the token embodies the current state of knowledge of the SDS, this provides a consistent means of propagating knowledge in a way that is independent of the different functionalities and underlying algorithms associated with these network states.

It now becomes straightforward to embed dialogue components (sub-dialogues) in other applications, or to interface to non-speech APIs from the SDS. The problems of modularity caused by mixed initiative dialogue approaches are largely solved since information which pertains to other sections of the dialogue may be invisibly transferred in and out of dialogue sub-components by the token. Additionally, the precise history of the dialogue is recorded and formally obtainable by the system designer.

Since recognition states are also traversed by the token, extracting the semantics of natural dialogue responses is straightforward. Furthermore, when the acoustic score is modifiable by the attached actions, the method allows such knowledge to be applied to the recognition process itself. Consequently, many things which have not hitherto been possible, or required expensive and varied ad-hoc techniques, are made possible by this approach. These include the application of non-context-free semantic constraints, semantic class modelling, stable error-correction procedures and the possibility of incorporating prosodic cues into the recogniser.

Lastly, the inclusion of *output* states into the augmented network means that recent advances in barge-in technology (*barge-in* is the process whereby a user is allowed to interrupt system output) can be put to greater effect, since the recognition process can be made fully aware of the point in the speech output at which the user started to respond.

The token may be copied and updated where necessary through each state in the augmented transition network as

the dialogue controller passes therethrough, so that the route to a current position in the network can be traced.

One example of the present invention will now be described with reference to the accompanying drawings, in which:

Figure 1 is a schematic diagram showing the structure of a system according to the present invention;

Figure 2 is a schematic diagram showing a transition network that represents a simple sub-dialogue whose function is to elicit a date from the user;

Figure 3 is a schematic diagram of a transition network representing a simple sub-syntax describing the different ways in which the user may specify a date;

Figure 4 is a schematic diagram of a semantic operations and

Figure 5 is a schematic diagram of a further semantic operation.

The main components of a system according to the present invention are illustrated in figure 1. Overall operation is controlled by dialogue control means 1 according to an application-specific dialogue specification the function of which is to exchange information with a user and access, update, or otherwise exercise control over an object system 3. User interaction consists of a sequence of question/answer cycles where each question is designed to elicit some specific information. Output is generated by means of a generator, in this example a speech output generator. The response of the user is processed by the input device 4, in this example, a speech recogniser. Based upon any input the dialogue control means 1 updates its internal control state and determines the next action of the system. This continues until the information need of the user is satisfied and the interactive operation is terminated.

An alternative scheme, for which this system is equally applicable, is where the overall control is vested with the target system 3, and this calls on the dialogue



control means 1 to invoke a particular sub-dialogue specified by 2.

The dialogue control means 1 employs augmented transition networks specified in the specification 2 to control the operation of the system. Figure 2 shows an example of such a network, which represents a simple sub-dialogue, the function of which is to obtain a date from a user. Basically, it consists of a set of states 10 linked together by directional transitions 11. The states 10 represent a system action, such as a question/answer cycle, data processing, a simple junction, or a sub-dialogue state, which expands to another similar network. The transitions 11, and their associated conditions, determine the course of dialogue flow after a particular state 10 has been reached and executed.

A similar network is also used in the system in order to provide syntactic constraints for speech input. In this case, grammatical rules may be expressed in the form of finite state networks, such as the "date" network shown in figure 3. Again, there are states 10 and transitions 11, but in this case the states represent an acoustic phenomenon such as a word, to be matched with incoming speech data, or, as before, sub-networks or simple junctions.

Speech output is typically derived from a simple text string which can be translated by the speech output device 5 into speech. This can be done by using a simple, well known, text-to-speech algorithm, or by joining together previously recorded acoustic wave forms. In the current system this is preferably treated as a very simple network with a single permissible path, and with each output word representing a state 10.

Employment of the above structure means that all states, whether associated with speech output, speech input, or overall dialogue control, can be associated with an action or actions 12, each of which is a simple procedural form specified by the system designer. This, in

turn, allows the provision of action which receives, modifies, and then forwards, a token. The token is an object which contains information embodying the current state of knowledge of the system, and a link to its predecessor, from which the history of the dialogue up to the point of the action in question can be obtained. The token should consist in part of a set of fields that are known and modifiable by the previously defined control means 1, input device 4 and output device 5, and which are also accessible to the application-specific actions 12 and transition conditions 11. For example, recognition and confidence corresponding to speech input, or the count of the number of times that a dialogue state has been traversed. In addition the token has a further set of fields which may be specified by a system designer, known and modifiable by the application specific actions attached to the states 10 and transition conditions 11. The token is arranged to be propagated according to the transitions in the network in the system and is copied to state actions. Copying varies upon the context of the state action.

For example, in the case of dialogue, propagation occurs as and when states are encountered (as dictated by transition conditions), based on token fields. When the dialogue system is embedded within another application, as can be the case with this system, the token is passed by the calling application to the entry state of the sub-dialogue and copied back from the exit state on completion of the dialogue.

For the states which require a user interaction the token is copied to the initial state of the speech output.

For speech output, copying occurs synchronously with the speech output itself, but a token exiting any speech output state is also transmitted to the start of the speech recognition network. In the case of speech input, each token is copied time-synchronously for each incoming token and for each hypothesis (i.e. for each alternative path

through the input network) as and when it is considered by the recogniser. During recognition, competing tokens arriving at the same state can be recombined according to a simple comparison of sets of fields nominated by a system designer. Such fields may represent the semantics of a particular utterance. At the end of recognition, only the best scoring token is re-transmitted to the dialogue network following therefrom.

The employment of tokens of the above type and the passage of them through the whole operation of the system, not solely from the speech recognition, speech output, or dialogue control, has considerable advantages.

For example, unless complex systems are broken down into independent sub-components which interface in a well-defined way with the rest of the system, design of such systems is time consuming and complex. Development time and complexity can be reduced, however, by developing and testing sub-components separately and then combining them. This is difficult to do, however, and still ensure that the interface definitions do not have to be restructured, making modularity difficult to achieve in practice. Furthermore, dialogues are often implemented in such systems using conventional programming language variable scoping. This leads to much of the knowledge of a system being implemented as some form of global variable, as this is often the simplest way to make sure that all components of a dialogue have access to the appropriate knowledge. With this, however, modularity is lost, and sub-dialogues cannot straightforwardly be extracted from one system and plugged into another, as there will not be a consistent set of global variables. In addition, global variables, once updated, lose all information pertaining to previous settings, meaning that it is difficult to obtain back tracking information without explicit result saving, which can be complicated and error-prone.

The arrangement of the present invention overcomes these problems. Dialogue sub-components may specify an

interface in terms of token fields which are intended for import/export to the rest of the system and may also maintain a set strictly local to the sub-components. All other fields are still transferred by the token, but invisibly to sub-components which do not explicitly import them. This means, for example, that extra, unelicited, information that may be supplied by a user in mixed initiative dialogues, such as the time of day in a response "to Edinburgh this evening", can be carried forward through the dialogue until a sub-component that recognises the extra information, in this case, a time, can be found.

In addition, and most importantly, the system of the invention means that the current state of knowledge at all stages of the dialogue is known, given that the token is copied from state to state, and can therefore be regained as required. This is useful during debugging of a system in development, in backtracking during operation, and for the provision of a formal history mechanism, whereby the application designer can pose arbitrary questions concerning previous utterances in the history of the dialogue.

There are additional features that can be provided in the system once the employment of tokens of the type described above is realised.

A first example is the extraction of knowledge from recognition results. In prior art systems there is often a substantial post-processing phase, often involving sophisticated parsing techniques, which now becomes simple with the system and method of the present invention. In effect, this is because the parsing is now performed by the speech recogniser. In figure 3 specific states have black triangle marks which indicate that they have a semantic action 12 attached. A typical action might be associated with a time sub-syntax state. Before the action is taken, the system fills in the recognition and confidence fields of the associated token with an actual recognition, such as "at half past 5". In this example hour and minute have

already been set during traversal of the time syntax, and the action simply records the time, and the confidence for the whole of the time utterance. The syntactic variant employed by the user (that is "at half past 5", as opposed to "5.30", "17.30", etc), is also recorded in this example, and this may then be used in the confirmation procedure. It is important to note that with the system of the invention the confidence of any selected part of the input can be obtained trivially, an advantage for the application designer in assessing the confidence with which the semantics of a user-utterance should be held, and also meaning that, when expedient, it is possible to restrict explicit confirmation only to those sections of the input which are uncertain.

Another example is the employment of dialogue knowledge to guide the recogniser. It is common for constraints on the recogniser to be syntactic, and to take the form of the grammatical rules of the language being recognised. Unfortunately, in practice spoken dialogue is often not so closely tied with grammatical rules, and constraints must be loosened in order to accommodate a more natural dialogue style, reducing recognition accuracy. With the system of the present invention, however, additional semantic constraint can be employed.

Semantic constraints relate to the meaning of an utterance, and are rarely broken by well-motivated users. For example, a speaker is unlikely to say "I wish to travel to London from London", "February 31", or to reply to a question such as "Do you want to leave on Sunday morning?" with "No. I want to leave on Sunday morning.". Typically, such constraints are non-context-free, and cannot be applied using conventional syntax networks without considerable inconvenience and difficulty. Using the present method of invention, however, these sort of constraints can be applied strictly without compromising natural responses generated by the system. Recognition can return a score which is then added by the system to the

acoustic likelihoods employed in the recognition, which can simply turn paths on or off depending upon the semantics denoted by field defined by a system designer. Figure 5 shows a simple example of this for a confirmed date syntax, where a return value of zero means that a pass is unaffected by semantic constraint, and a return value of the infinity that the path is forbidden.

Related to the above is the employment of semantic classification statistics. In recent years significant advantages in speech recognition have been achieved by the application of statistics to the use of dialogue and to the order in which words are spoken, with the statistical probability adjusting the raw acoustic scores produced by the speech recogniser. For the "date" syntax shown in figure 2 the employment of such a technique would involve the association of probabilities with the various paths through the network, the probabilities corresponding to the frequency with which the path is selected and hence the frequency with which a particular syntactic form is selected by users in order to specify a date. Similarly, if the user is permitted to enter several different items, date, times, place, etc, in one utterance, the order in which these items tend to be specified can be recorded as similar statistical processing applied. In practice, however, such processing is limited to relationships which can be expressed in terms of a conventional context-free grammar. In interactive dialogues, there is a common tendency for users to confirm information already supplied by repeating it within the same utterance or at a later stage in the dialogue. This tendency cannot be modelled by conventional context-free grammars, and so much statistical information is lost.

With the method and system of the invention this problem can be solved. For example, consider the two responses: "to London - to London from Manchester" and "To London - to Durham from Manchester". Syntactically they are identical consisting of two "to place" sub-syntaxes

followed by "from place", and would be assigned the same weight using conventional probabilistic syntactics. Semantically, however, they are very different, the first representing a confirmation of a previous assertion, and  
5 the second a correction. Figure 5 shows how these cases can be distinguished by assigning different paths for each and then using collected data to assign probabilities to the path, in a simple conventional manner.

The system and method of the present invention also  
10 enables the propagation of acoustic likelihoods. Dialogues usually involve several interchanges between a user and a system. For each user utterance acoustic scores are available which support (or reject) the various hypotheses that the system might make about the user's intentions, for  
15 example that the user wishes to travel to a certain place. These constitute independent pieces of evidence for or against an initial hypotheses and as such can be combined using Bayesian statistics, so that the probability of a hypotheses becomes ever more certain (or remote) as the  
20 system proceeds from utterance to utterance. The system and method of the present invention can perform this simply by transferring appropriate information via the token or tokens passing through the system. Prior art systems do not work so easily, however. For each utterance,  
25 recognition starts afresh, considering all earlier hypotheses as equally likely.

An example of the advantages provided in relation to this is in relation to error correction. A dialogue can become very long and tedious if every piece of information  
30 must be explicitly confirmed. If such confirmation is not employed, however, the user must be able to correct selected items presented to them by the system. This means that syntax constraints must be very wide, leading to a high chance of false correction. With the present  
35 invention this problem disappears because the system can accumulate hypotheses' probabilities based on previous utterances and can use them to weight future recognition

results. This in turn has benefits in that a number of irreversible decisions the system designer must make are in use. For example, because a hypotheses is supported by some high confidence level in the prior art the designer  
5 may be required to accept such hypotheses as true, but with the system and method of the present invention of course assumptions can also be rectified without compromising overall system ability.

A yet further benefit of the present invention is that  
10 a consistent way is provided in which the system can be configured to employ other knowledge sources which might typically be used to assist recognition. Humans use this extensively to aid understanding. For example a likelihood of a particular event can be improved with a travel or  
15 directory enquiry given the knowledge that a caller's home city is more likely to be involved in the enquiry than any other city. Other acoustic clues, such as prosody can also be employed. For example, if a user is confirming a set of  
20 correct digits, but puts emphasis on digits which are currently recognised wrongly it has considerable benefits if the system is able to access some measure of the emphasis applied. This can be arranged simply with the invention by employment of the tokens.

A yet further example of the benefits of the present  
25 invention is the employment of "barge-in". Barge-in has become very popular in SDS. Users are allowed to interrupt system output, perhaps to contradict a false statement, or simply to anticipate the question. Barge-in is, however, highly problematical. Recognition is not so good, non-  
30 speech noises, such as coughing, can produce an unwanted interrupt, and responses are very difficult to understand without knowing quite precisely when, in relation to the output, the user interrupted the system.

With the system and method of the present invention,  
35 by the explicit flow of tokens from output states to the start of the recognition network, these problems can ameliorated. Different recognition syntaxes may be



employed for interruptions, and explicit action may be taken to compensate for the increased unreliability of recognition in such the circumstances.

CLAIMS

1. A man-machine dialogue system comprising an interactive computer system with:

- 5        an input device for receiving input from a user;  
      an output device for generating output to a user;  
      an object system which is an information source or store, or a command and control device, the object of the dialogue being to interface between this system and a  
10    user;

      a dialogue manager, which controls the dialogue between the object system and a user dependent upon: a dialogue specification, comprising a set of augmented transition networks (ATNs), having a set of states  
15    through which are propagated one or more tokens, each token comprising a set of fields which together define the current state of belief of the dialogue controller, dependent upon the preceding user-system interchanges and information obtained from the object system.

20

2. A system according to claim 1, further comprising means for copying and updating the token through each state in an ATN as the dialogue controller passes therethrough.

25

3. A system according to claim 2, wherein each token is linked to its predecessor, so enabling the dialogue controller to regain a previous state of data maintained at some point during the history of the  
30    dialogue.

4. A system according to any of claims 1 to 3, wherein each state is associated with an action or actions, and each action may receive, modify and transmit  
35    a token or tokens.

16

5. A system according to any of claims 1 to 3, employing an ATN to specify the course of the dialogue, and wherein each state may represent a junction, a system action, such as a user interaction, or an embedded  
5 dialogue represented by a further augmented transition network.

6. A system according to any of claims 1 to 5, where  
10 the input device is a speech recogniser.

7. A system according to any of claims 1 to 6,  
where the input device is constrained by a set of  
statistical grammars which may be defined using an ATN.

8. A system according to claim 6 or claim 7,  
wherein each of the states may represent a junction, a  
terminal state, such as a word or other acoustical  
phenomenon, or an embedded statistical grammar  
represented by a further ATN.

9. A system according to claim 7 or claim 8,  
wherein tokens are propagated from the user-interaction  
dialogue state to the start of the input network, and  
through a best matching path of the input network back to  
25 the user-interaction dialogue state.

10. A system according to claim 7, 8 or 9, wherein  
a token is propagated for each alternative input  
hypothesis considered by the input device, and the score  
30 assigned to the hypothesis is a modifiable field of the  
token.

11. A system according to any of claims 1 to 10,  
wherein the output device is a speech generator.

35

5           13. A system according to claim 11 or claim 12,  
where the states represent an output word or other  
acoustical or linguistic phenomenon.

14. A system according to claim 12, wherein tokens  
10 are propagated from the dialogue user-interaction state  
to the first useroutput state, and from each user output  
state to the start of the input network.

1/4

Fig.1.

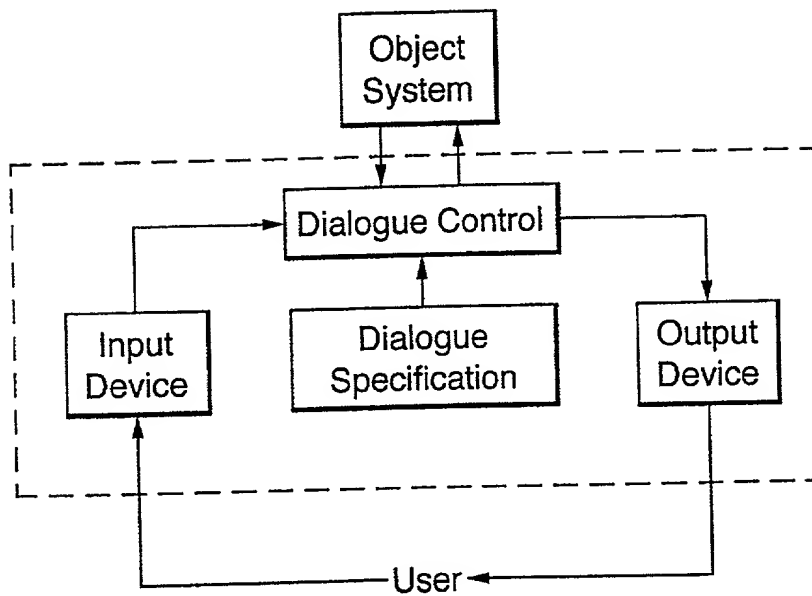


Fig.2.


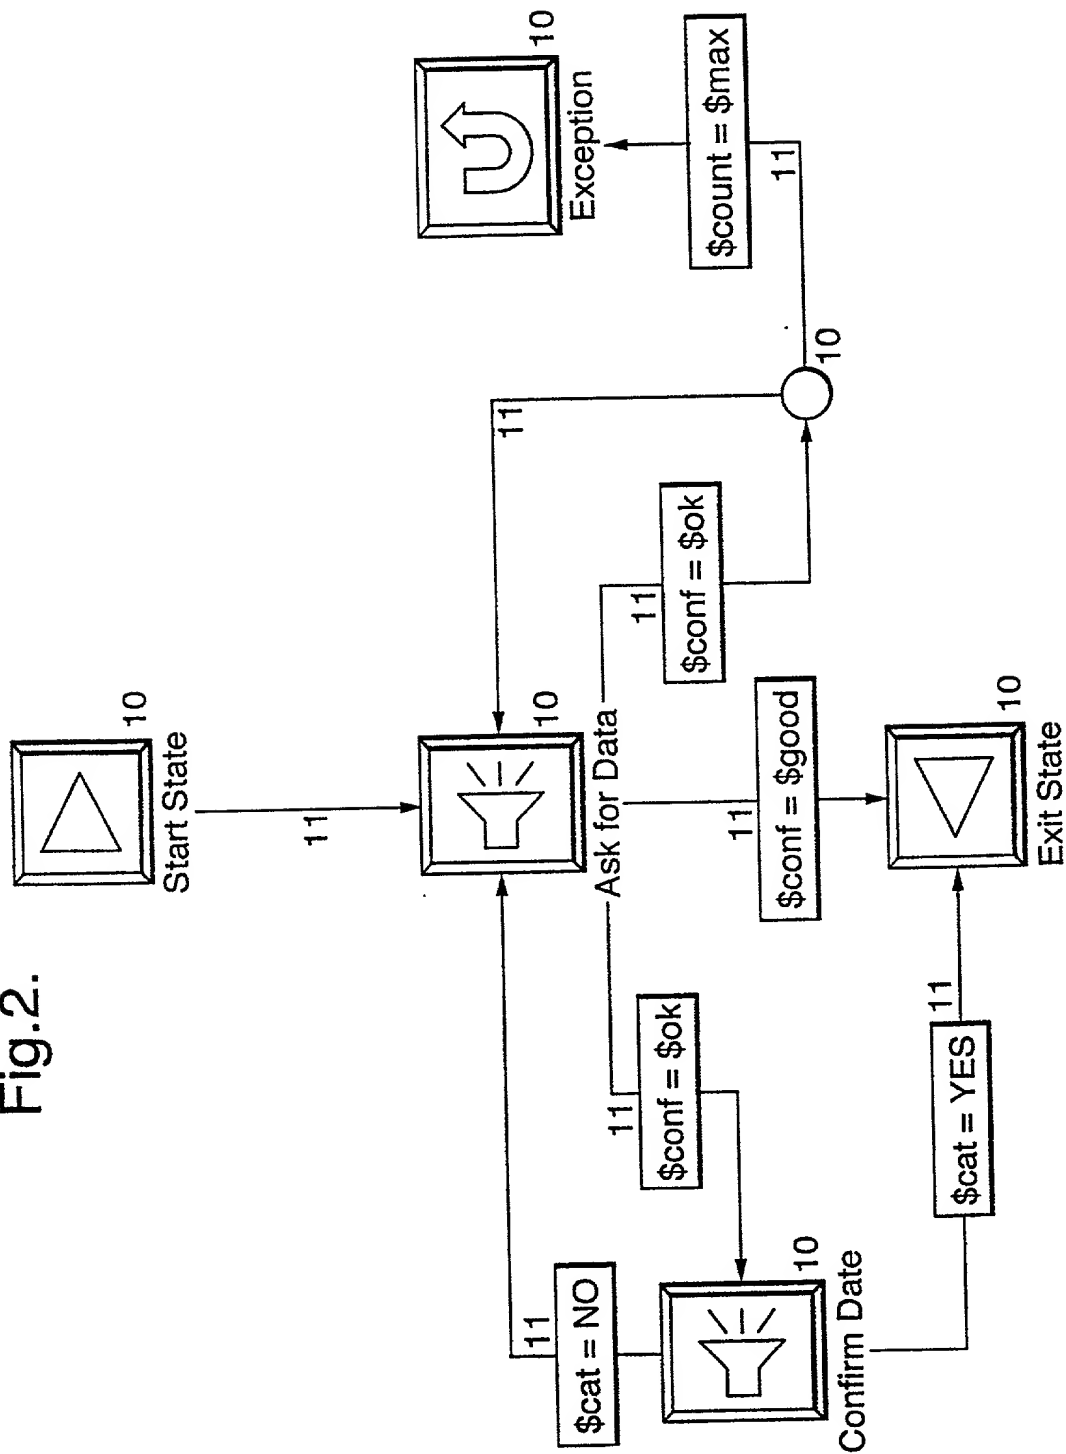


Fig. 3.

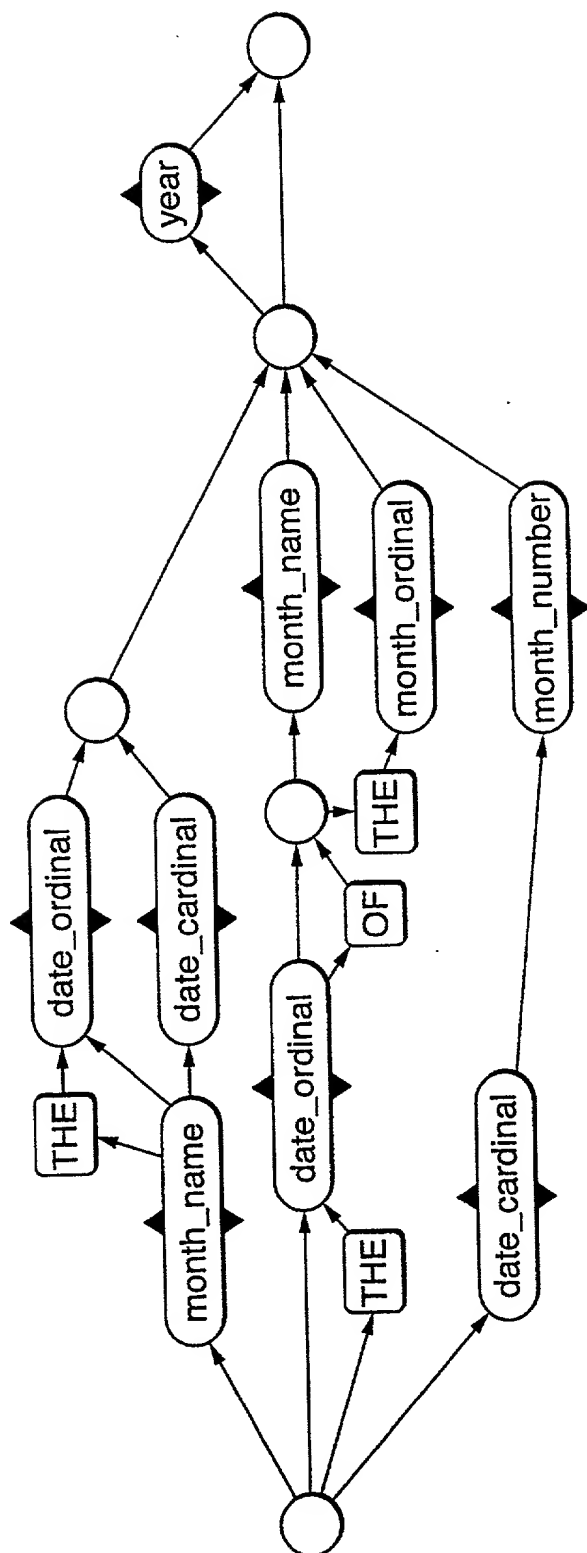

**F** **E** **C** **O** **N** **T** **A** **I** **N** **G**

4/4

Fig.4.


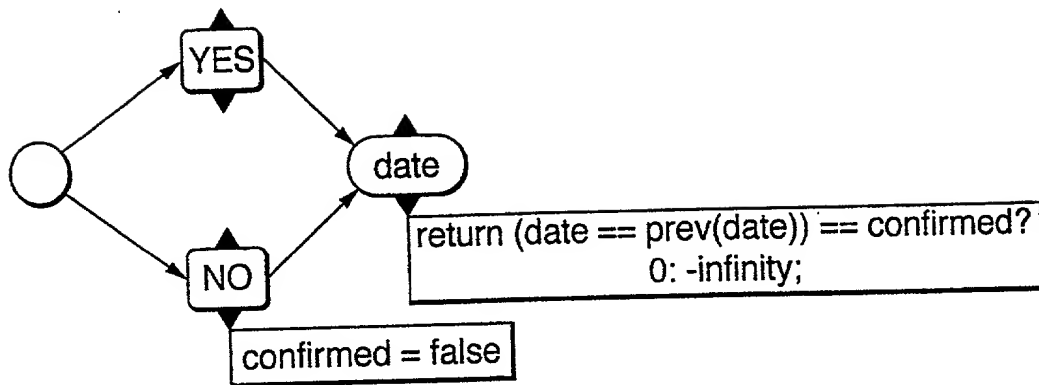


Fig.5.





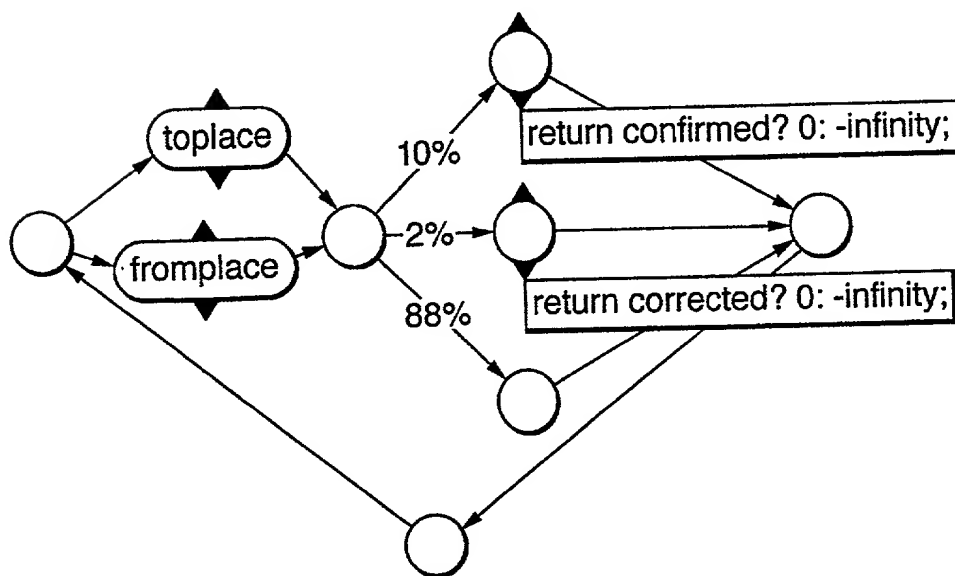

## PATENT APPLICATION

DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

ATTORNEY DOCKET NO. M61.12-0392

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

the specification of which is filed herewith unless the following box is checked:

(X) was filed on September 11, 2001 as US Application Serial No. 09/936,623.

Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

## Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
GB	PCT/GB00/00441	11.02.00	YES: <u>X</u> NO:
JP	99301883.7	12.03.99	YES: <u>X</u> NO:

## Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

## U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS(patented/pending/abandoned)

## POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) listed below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Add Attorney Name and Reg. No.	Katie E. Sako, Reg. No. <u>32628</u>	Daniel D. Crouse, Reg. No. <u>32022</u>	Judson K. Champlin, Reg. No. <u>34,797</u>
Joseph R. Kelly, Reg. No. <u>34,847</u>	Nickolas E. Westman, Reg. No. <u>20,147</u>	Steven M. Koehler, Reg. No. <u>36,188</u>	David D. Brush, Reg. No. <u>34,557</u>
John D. Veldhuis-Kroeze, Reg. No. <u>38,354</u>	Deirdre Megley Kvale, Reg. No. <u>35,612</u>	Theodore M. Magee, Reg. No. <u>39,758</u>	Christopher R. Christenson, Reg. No. <u>42,413</u>
Brian D. Kaul, Reg. No. <u>41,885</u>	Robert M. Angus, Reg. No. <u>24,383</u>	Christopher L. Holt, Reg. No. <u>45,844</u>	Alan G. Rego, Reg. No. <u>45,956</u>
David C. Bohn, Reg. No. <u>32,015</u>			

## Send Correspondence to:

Contact Name  
Firm Name Westman Champlin & Kelly P.A.  
Firm Address 900 Second Ave. S., Ste. 1600  
City, State and Zip Minneapolis, MN 55402-3319

## Direct Telephone Calls To:

Contact Name  
Contact Phone Number 612-334-3222


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Caroline Matheson

Citizenship: United Kingdom

Residence: Cambridge, United Kingdom *GBX*

Post Office Address: Kent House, High St., Swaffham Prior, Cambridge CB5 0LD

*100*  
  
Inventor's Signature

*29/01/02*  
Date